

CM089-2HDSDV

8,9" Wide HD/SD-SDI Monitor



8,9" HD/SD-SDI Monitor

LED Backlight / **LOW POWER CONSUMPTION 10W**



General features

- 1024x600 Resolution
- LED backlight
- 2 HD/SD-SDI inputs with active loop through
- 1 composite video input with passive loop through
- Optional DVI
- Tally (2 colours) and 16 character text inserter TSL compatibles
- Audio vu-meters (4 channels per input)
- Markers and safe areas
- Blue only/Mono
- Gamma correction
- Over Scan
- RS-232 control
- RJ-45 (RS-485 communications)



Direct Keys to select Brightness, Contrast, Saturation, 4:3 and 16:9, Blue/Mono, Over Scan, Marker, Gamma...


SPECIFICATIONS

Display size	8,9"
Resolution	1024x600
Aspect ratio	16:9
Viewing angle	176,176
Brightness	300 cd/m ²
Contrast	700:1
HD/SD-SDI inputs	2 x BNC
Supported resolutions	720p (60/59.94) 1080i(60/59.94/50), 1080p(25) 576i(50)
HD/SD-SDI outputs	2 x BNC active loop
Composite Video Inputs	1 x BNC
Composite Video Outputs	1 x BNC passive loop
Text inserter	16 characters (IMD) TSL comp.
Tally	Green and red TSL comp. GPIO Connector 9 pins
Remote control	RS-232 RJ-45 (RS-485 communications)
Audio vu-meters	4 channels per input
Chassis	Metallic
Dimensions	220 x 175 x 60 mm (4U)
Operating temperature	5 °C a 40 °C
Operating humidity	5% a 90%
Power supply	12V DC (XLR Connector)
Power consumption	10W
Accessories	AC089R: 19" Rack mounting kit CA-PE089: Stand



AC089R: 19" rack mounting kit

DIMENSIONS

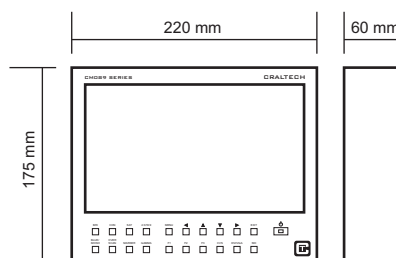

Specifications are subject to change without prior notifications