

CM170W-2HDSDV

17" Wide HD/SD-SDI Monitor



17" HD/SD-SDI Monitor



General features

- 1366x768 Resolution
- 2 HD/SD-SDI inputs with active loop through
- 1 composite video input with passive loop through
- Tally (2 colours) and 16 character text inserter TSL compatibles
- Audio vu-meters (4 channels per input)
- Markers and safe areas
- Blue only/Mono
- Gamma correction
- Over Scan
- RS-232 control
- RJ-45 (RS-485 communications)




Direct Keys to select Brightness, Contrast, Saturation, 4:3 and 16:9, Blue/Mono, Over Scan, Marker, Gamma...

SPECIFICATIONS

Display size	17"
Resolution	1366x768
Aspect ratio	16:9
Viewing angle	178, 178
Brightness	350 cd/m ²
Contrast	900:1
HD/SD-SDI inputs	2 x BNC
Supported resolutions	720p (60/59.94) 1080i(60/59.94/50), 1080p(25) 576i(50)
HD/SD-SDI outputs	2 x BNC active loop
Composite Video Inputs	1 x BNC
Composite Video Outputs	1 x BNC passive loop
Text inserter	16 characters (IMD) TSL comp.
Tally	Green and red TSL comp. GPIO Connector 9 pins
Remote control	RS-232 RJ-45 (RS-485 communications)
Audio vu-meters	4 channels per input
Chassis	Metallic
Dimensions	441 x 265 x 93 mm (6U)
Operating temperature	5 °C a 40 °C
Operating humidity	5% a 90%
Power supply	24V DC (XLR Connector)
Accessories	CA170WR: 19" Rack mounting kit CA-PE15-17: Stand

DIMENSIONS

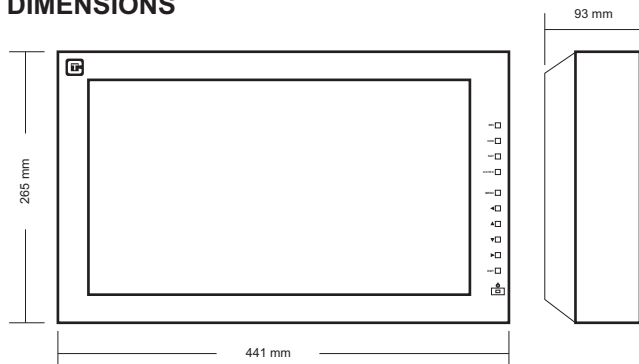

CA-PE15-17: Stand



AC170WR: 19" mounting kit

Specifications are subject to change without prior notifications