

CM170W-8HDSD / CM170W-8HDSDA


17" HD/SD-SDI Multiviewer Monitor



17" HD/SD-SDI Multiviewer Monitor 8 HD/SD-SDI Monitors



SCREEN CONFIGURATIONS

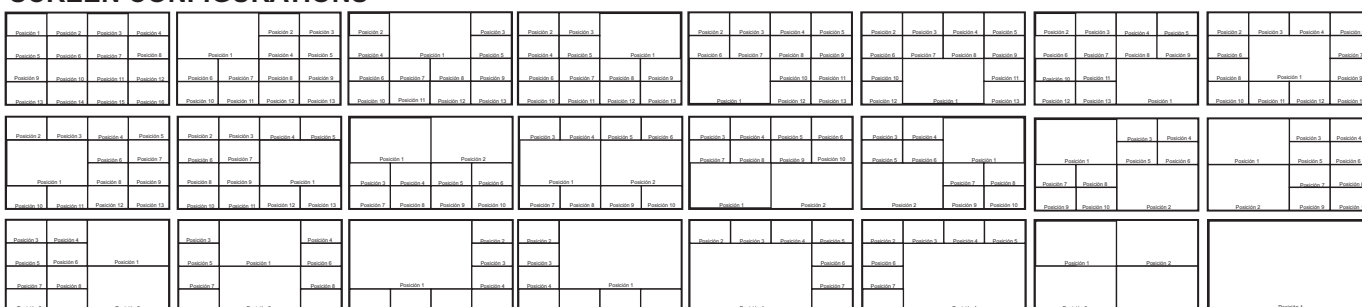

These configurations are selectable through OSD or remote control RS-232.
Possibility to allocate to each position the wanted input.

SPECIFICATIONS

	CM170W-8HDSD / CM170W-8HDSDA
Display size	17"
Resolution	1366x768
Aspect ratio	16:9
Viewing angle	178,178
Brightness	350 cd/m ²
Contrast	900:1
HD/SD-SDI inputs	8 x BNC
Supported resolutions	720p (60/59.94) 1080i(60/59.94/50) 576i(50)
Text inserter	16 characters (IMD) TSL comp.
Tally	Green and red TSL comp. GPIO Connector
Remote control	RS-232
Audio vu-meters	Ref. CM170W-8HDSDA 4 channels per input
Chassis	Metallic
Dimensions	441 x 265 x 93 mm (6U)
Operating temperature	5 °C a 40 °C
Operating humidity	5% a 90%
Power supply	24V DC (XLR Connector)
Accessories	AC170WR: 19" Rack mounting kit CA-PE15-17: Stand


These monitors have **8 HDSDI/SDSDI inputs** and multiple screen configurations set from factory selectable through OSD or remote control RS-232.

Each input has text inserter (**IMD In-monitor Display**) of 16 characters, two colour **tally**, and ref. CM170W-8HDSDA has embedded audio **vu-meters** (4 channels per input).

Through OSD it is possible to set screen configuration, and variables like border colour, text colour,...

The **CMS software** is available to configure and control the Multiviewer remotely.

DIMENSIONS

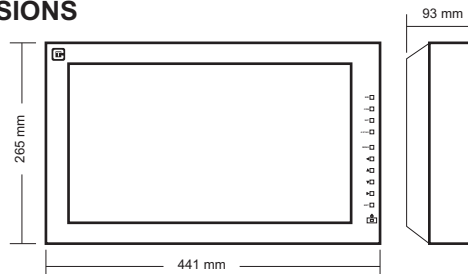

CA-PE15-17: Stand



AC170WR: 19" mounting kit

Specifications are subject to change without prior notifications