

# CM170W-HDSDV

## 17" Wide HD/SD-SDI Monitor



## 17" HD/SD-SDI Monitor



### General features

- 1366x768 Resolution
- 1 HD/SD-SDI input with active loop through
- 1 composite video input with passive loop through
- Optional DVI
- Tally (2 colours) and 16 character text inserter TSL compatibles
- Markers and safe areas
- Blue only/Mono
- Gamma correction
- Over Scan
- RS-232 control
- RJ-45 (RS-485 communications)




Direct Keys to select Brightness, Contrast, Saturation, 4:3 and 16:9, Blue/Mono, Over Scan, Marker, Gamma...

### SPECIFICATIONS

|                         |  |
|-------------------------|--|
| Display size            | 17"  |
| Resolution              | 1366x768   |
| Aspect ratio            | 16:9   |
| Viewing angle           | 178, 178   |
| Brightness              | 350 cd/m <sup>2</sup>  |
| Contrast                | 900:1  |
| HD/SD-SDI inputs        | 1 x BNC  |
| Supported resolutions   | 720p (60/59.94)<br>1080i(60/59.94/50), 1080p(25)<br>576i(50) |
| HD/SD-SDI outputs       | 1 x BNC active loop  |
| Composite Video Inputs  | 1 x BNC  |
| Composite Video Outputs | 1 x BNC passive loop   |
| Text inserter           | 16 characters (IMD) TSL comp.                                |
| Tally                   | Green and red TSL comp.<br>GPIO Connector 9 pins             |
| Remote control          | RS-232<br>RJ-45 (RS-485 communications)                      |
| Chassis                 | Metallic   |
| Dimensions              | 441 x 265 x 93 mm (6U)                                       |
| Operating temperature   | 5 °C a 40 °C   |
| Operating humidity      | 5% a 90%   |
| Power supply            | 24V DC (XLR Connector)                                       |
| Accessories             | CA170WR: 19" Rack mounting kit<br>CA-PE15-17: Stand          |

### DIMENSIONS

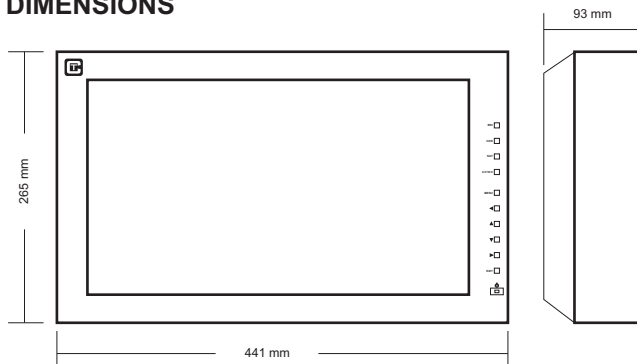

CA-PE15-17: Stand



AC170WR: 19" mounting kit

Specifications are subject to change without prior notifications