

CM170-4HDSD

17" HD/SD-SDI Quad Split Monitor



17" Quad Split HD/SD-SDI Monitor 4 HD/SD-SDI inputs

1280
x
1024
Resolution

HDSDI
SDSDI
4 Inputs

Single and Quad
Screen
Configuration

TSL
IMD
Tally

These 17" monitors have **4 HDSDI/SDSDI input**, and using direct keys of front panel is possible to display full screen of each input or quad visualization.



Each input has text inserter (**IMD In-monitor Display**) of 8 characters TSL compatibles and two colour **tally**.

Through OSD it is possible to set colorimetry and other variables, and an RS-232 control connector is available for remote control.

SPECIFICATIONS

Display size	17"
Resolution	1280x1024
Aspect ratio	5:4
Viewing angle	178,178
Brightness	290 cd/m ²
Contrast	1500:1
HD/SD-SDI inputs	4 x BNC
Supported resolutions	720p (60/59.94) 1080i(60/59.94/50) 576i(50)
Text inserter	8 characters (IMD) TSL comp.
Tally	Green and red TSL comp. GPIO Connector
Remote control	RS-232
Chassis	Metallic
Dimensions	425 x 308 x 60 (7U)
Operating temperature	5 °C a 40 °C
Operating humidity	5% a 90%
Power supply	12V DC
Accessories	AC170R: 19" Rack mounting kit CA-PE15-17: Stand

SCREEN CONFIGURATIONS

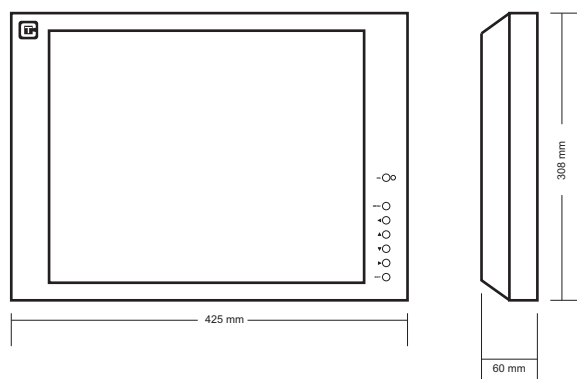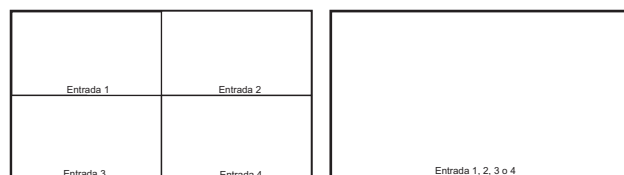

AC170R: 19" mounting kit



CA-PE15-17: Stand

Specifications are subject to change without prior notifications