

# CM170-4SD

## 17" Quad Split SDI Monitor



## 17" Quad Split SD-SDI Monitor 4 SD-SDI inputs

1280  
1024  
Resolution

SDSDI  
4 Inputs

Single and Quad  
Screen  
Configuration

These 17" monitors have **4 SDSDI input**, and using direct keys of front panel is possible to display full screen of each input or quad visualization.

Each input has text inserter (**IMD In-monitor Display**) of 8 characters.

Through OSD it is possible to set colorimetry and other variables, and an RS-232 control connector is available for remote control.


### SCREEN CONFIGURATIONS

Signal Nr: 1	Signal Nr: 2	
Signal Nr: 3	Signal Nr: 4	

### SPECIFICATIONS

Display size	17"
Resolution	1280x1024
Aspect ratio	5:4
Viewing angle	178,178
Brightness	290 cd/m <sup>2</sup>
Contrast	1500:1
SD-SDI inputs	4 x BNC
Text inserter	8 characters
Remote control	RS-232
Chassis	Metallic
Dimensions	425 x 308 x 60 (7U)
Operating temperature	5 °C a 40 °C
Operating humidity	5% a 90%
Power supply	12V DC
Accessories	AC170R: 19" Rack mounting kit CA-PE15-17: Stand

### DIMENSIONS

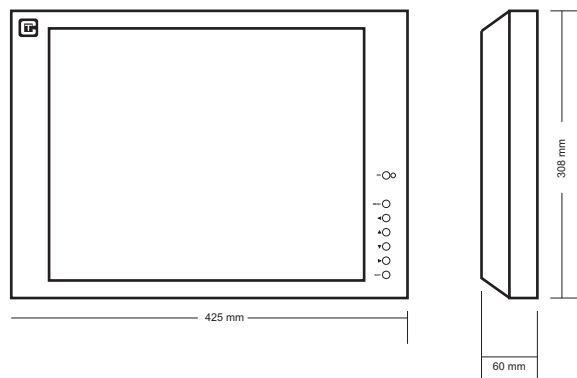

AC170R: 19" mounting kit



CA-PE15-17: Stand

Specifications are subject to change without prior notifications