

CM320MU-4HDSDA

32" HD/SD-SDI Quad Split Monitor



32" HD/SD-SDI Quad Split Monitor 4 HD/SD-SDI inputs

LED Backlight / **LOW POWER CONSUMPTION**



These 32" monitors have **4 HDSDI/SDSDI input**, and using direct keys of front panel is possible to display full screen of each input or quad visualization.

Each input has text inserter (**IMD In-monitor Display**) of 16 characters, two colour **tally**, and ref. CM240W-4HDSDA has embedded audio vu-meters (4 channels per input).


Through OSD it is possible to set screen configuration, and variables like border colour, text colour,...

The **CMS software** is available to configure and control the Multiviewer remotely.


SPECIFICATIONS

Display Size	32"
Resolution	1920x1080
Aspect ratio	16:9
Viewing angle	178,178
Brightness	400 cd/m ²
Contrast ratio	4.000:1
HDSDI/SDSDI inputs	4 x BNC
Supported resolutions	720p (60/59.94) 1080i(60/59.94/50) 576i@50
Text inserter	16 characters (IMD) TSL comp.
Tally	Green and red TSL comp. 15 Pins GPIO Connector (red)
Vu-meters	4 channels per input
Remote control	RS-232, TSL (tally and IMD)
Chassis	Metallic
Dimensions	750,50 x 462,00 x 86,00 mm
Operating temperature	5 °C a 40 °C
Operating humidity	5% a 90%
Power supply	220 AC
Accessories	-

SCREEN CONFIURATIONS

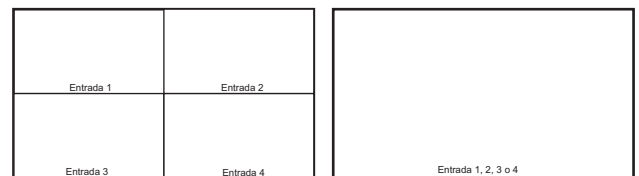

DIMENSIONS

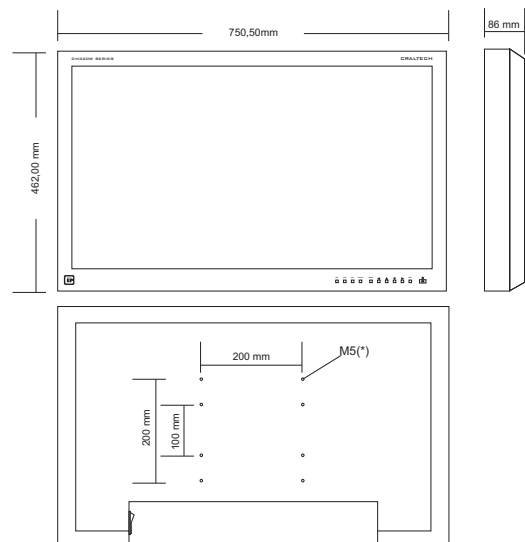

Specifications are subject to change without prior notifications