

Multiview Monitors


42" HD/SD-SDI Multiview Monitor



42" HD/SD-SDI Multiview Monitor 8, 12 or 16 HD/SD-SDI inputs



SCREEN CONFIGURATION OPTIONS SET FROM FACTORY

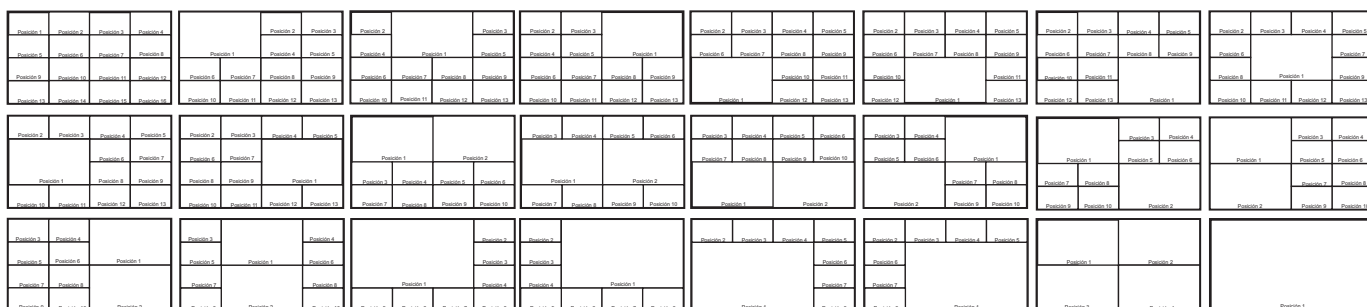

These configurations are selectable through OSD or remote control RS-232.
Possibility to allocate to each position the wanted input.

General features

Display Size	42"
Resolution	1920x1080
Aspect ratio	16:9
Viewing angle	178,178
Brightness	500 cd/m ²
Contrast ratio	1500:1
HD/SD/SDI inputs	4xBNC : CM420MU-4HDSDA 8xBNC : CM420MU-8HDSDA 12xBNC : CM420MU-12HDSDA 16xBNC : CM420MU-16HDSDA
Supported resolutions	720p (60/59.94) 1080i(60/59.94/50) 576i@50
Text inserter	16 characters (IMD) TSL comp.
Tally	Green and red TSL comp. 15 Pins GPIO Connector (red)
Vu-meters	4 channels per input
Remote control	RS-232, TSL (tally and IMD)
Chassis	Metallic
Dimensions	1015 x 624 x 114 mm
Operating temperature	5 °C a 40 °C
Operating humidity	5% a 90%
Power supply	220 AC


These monitors has **4, 8, 12 or 16 HD/SD/SDI** and multiple screen configurations set from factory selectable through OSD or remote control RS-232.

Each input has text inserter (**IMD In-monitor Display**) of 16 characters two colour **tally**, and embedded audio **vu-meters** (4 channels per input).

Through OSD it is possible to set screen configuration, and variables like border colour, text colour,...

The **CMS software** is available to configure and control the Multiviewer remotely.

DIMENSIONS

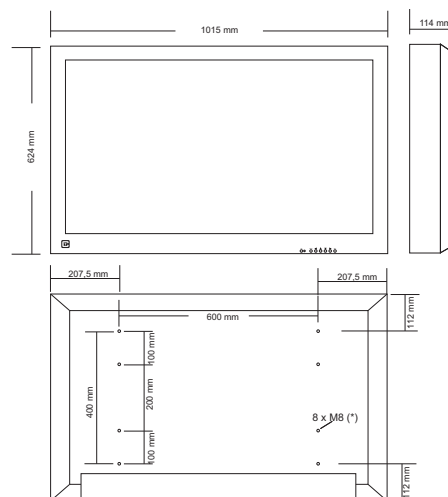

Specifications are subject to change without prior notifications