



Multiviewer Series

Modular System with SDI and CVS inputs



SCREEN CONFIGURATION OPTIONS SET FROM FACTORY



These configurations are selectable through OSD or remote control RS-232. Possibility to allocate to each position the wanted input.


This equipment has 4, 8 or 12 SDI, Composite Video or VGA inputs and multiple screen configurations set from factory and selectable through OSD or remote control RS-232

Each input has text inserter (IMD In-monitor Display) of 16 characters and red tally.


It is possible to mix different kind of inputs using 4 inputs modules in SDI and Composite Video and 2 inputs modules in VGA.

DIMENSIONS

4 and 8 inputs Multiviewer dimensions (1U)

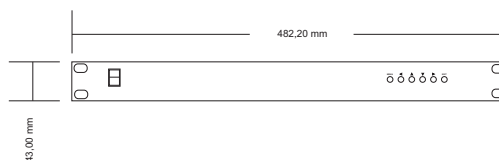

12 inputs Multiviewer dimensions (2U)

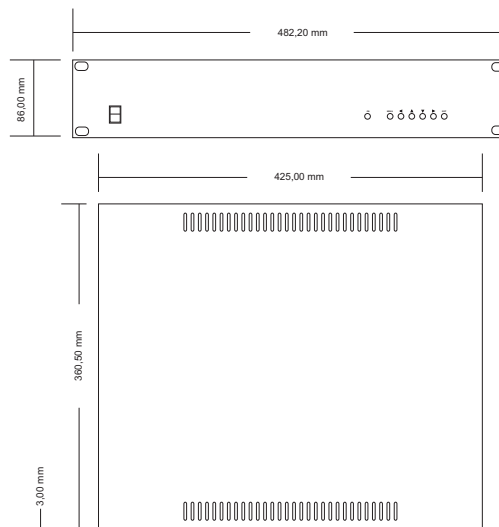

VGA Output	1 x 15 Pins
Output Resolution	1366x768
SDI inputs	4xBNC : CSMU-4SD1P 8xBNC : CSMU-8SD1P 12xBNC : CSMU-12SD1P
Composite Video Inputs	4xBNC : CSMU-4VC1P 8xBNC : CSMU-8VC1P 12xBNC : CSMU-12VC1P
Text inserter	16 characters
Tally	Red through GPIO Connector
Remote control	RS-232
Chassis	Metallic
Dimensions	482,20 x 86 x 360,50 mm
Operating temperature	5 °C a 40 °C
Operating humidity	5% a 90%
Power supply	220 AC

La información contenida en este documento esta sujeta a cambios