




## Multiviewer Series

Modular System with HD/SD-SDI, CVS, DVI inputs



### SCREEN CONFIGURATION OPTIONS SET FROM FACTORY

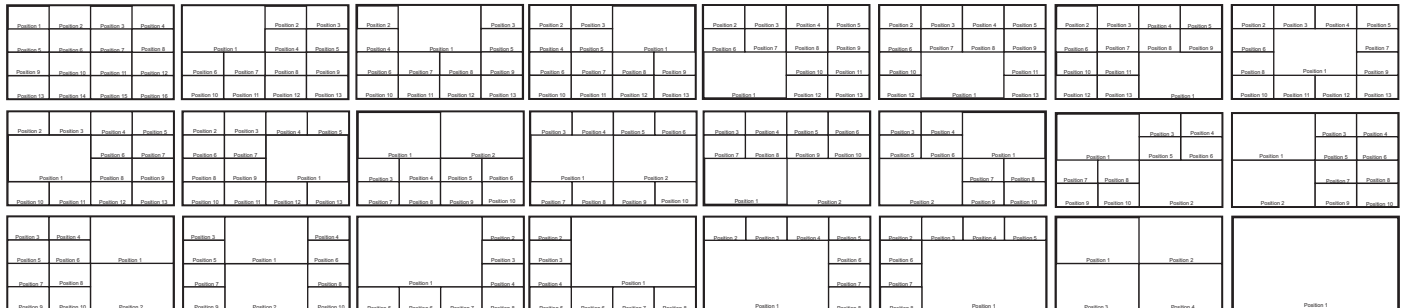

These configurations are selectable through OSD or remote control RS-232. Possibility to allocate to each position the wanted input.

### General features

This equipment has **4, 8, 12 or 16 HDSDI, SDSDI, Composite Video or DVI inputs**, and it is possible to mix different kind of inputs using 4 inputs modules in HDSDI, SDSDI and Composite Video and 2 inputs modules in DVI.

These Multiviewers has multiple screen configurations set from factory selectable through OSD or remote control RS-232. It is possible to configure the screen configuration directly using Direct Keys in the front panel. Through OSD other variables like border colour, text colours,...are adjustable.

Each input has text inserter (**UMD**) of 16 characters two colour **tally**, and embedded audio vu-meters (4 channels per input) in HDSDI and SDSDI versions.

The **CMS software** is available to configure and control the Multiviewer remotely.


### Ordering information

HDSDI/SDSDI	SDSDI	Composite Video
CSM-4HSDA: 4xBNC	CSM-4SD: 4xBNC	CSM-4CV: 4xBNC
CSM-8HSDA: 8xBNC	CSM-8SD: 8xBNC	CSM-8CV: 8xBNC
CSM-12HSDA: 12xBNC	CSM-12SD: 12xBNC	CSM-CV: 12xBNC
CSM-16HSDA: 16xBNC	CSM-16SD: 16xBNC	CSM-CV: 16xBNC

### Specifications

DVI Output	1 Output
Output Resolution	1920x1080
Inputs	4, 6, 8, 12 or 16 x BNC inputs (HDSDI/SDSDI/Composite Video)
Text inserter	16 characters
Tally	Red through GPIO Connector
Remote control	RS-232
Chassis	Metallic
Operating temperature	5 °C to 40 °C
Operating humidity	5% to 90%
	220 AC

### DIMENSIONS

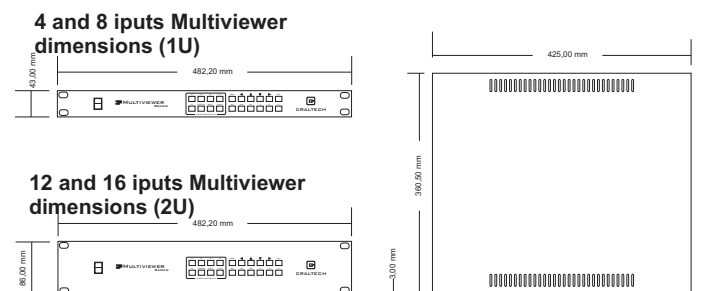

Specifications are subject to change without prior notifications